



Sikorsky UH-60L BLACK HAWK helicopter

Defending freedom worldwide




Sikorsky® UH-60L BLACK HAWK helicopter

U.S. Army multi-mission combat assault helicopter




UH-60 Cabin Configurations

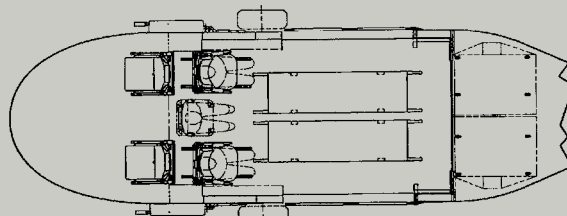


Casualty Evacuation

6 litters
5 crew

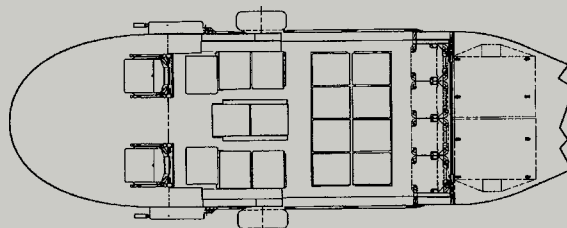

Troop Transport

15-20 troop seats
2 crew

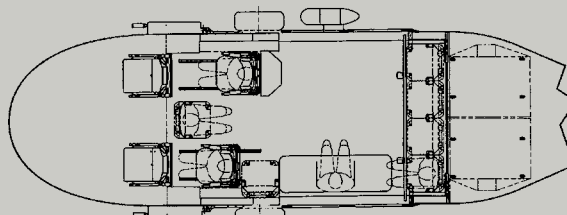

Search and Rescue

10 rescuees
2 crew

UH-60A/L Comparison at Mission Gross Weight

Performance	UH-60A	UH-60L
Maximum cruise speed		
- 4000 ft, 95°F	139 kts	152 kts
- 2000 ft, 70°F	147 kts	159 kts
- SLS	151 kts	155 kts
- VNE	195 kts	195 kts
Vertical Rate of Climb	(95% IP)	(95% MRP)
- 4000 ft, 95°F	390 fpm	1,550 fpm
- 2000 ft, 70°F	1,778 fpm	2,750 fpm
- SLS	2,236 fpm	3,000+ fpm
Service Ceiling (ISA day)	18,700 ft	19,150 ft
Hover Ceiling	(IP-O GE)	(MRP -OGE)
- 95°F day	5,400 ft	7,650 ft
- 70°F day	7,311 ft	9,375 ft
- Standard day	9,650 ft	11,125 ft
Engines		
Number of engines/type	Two T700-GE-700 turboshaft	Two T700-GE-701C turboshaft
Power (per engine)	1,560 shp	1,940 shp
Weights		
Weight empty	11,284 lb	11,516 lb
Mission gross weight	16,994 lb	17,432 lb
Maximum gross weight	20,250 lb	22,000 lb
Maximum gross weight (ferry)	24,500 lb	24,500 lb

UH-60A/UH-60L External Lift Comparison

